
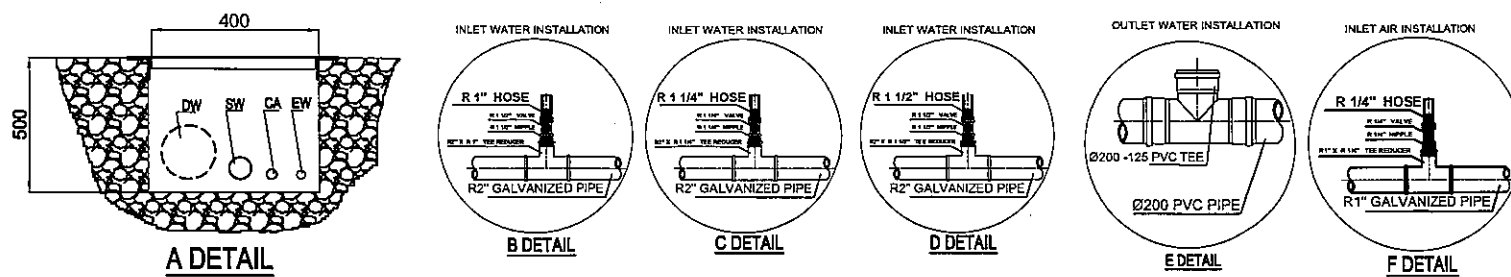


14 09B3 386.2

HYP-01

MTV 90/40D PE PIPE EXTRUSION LINE

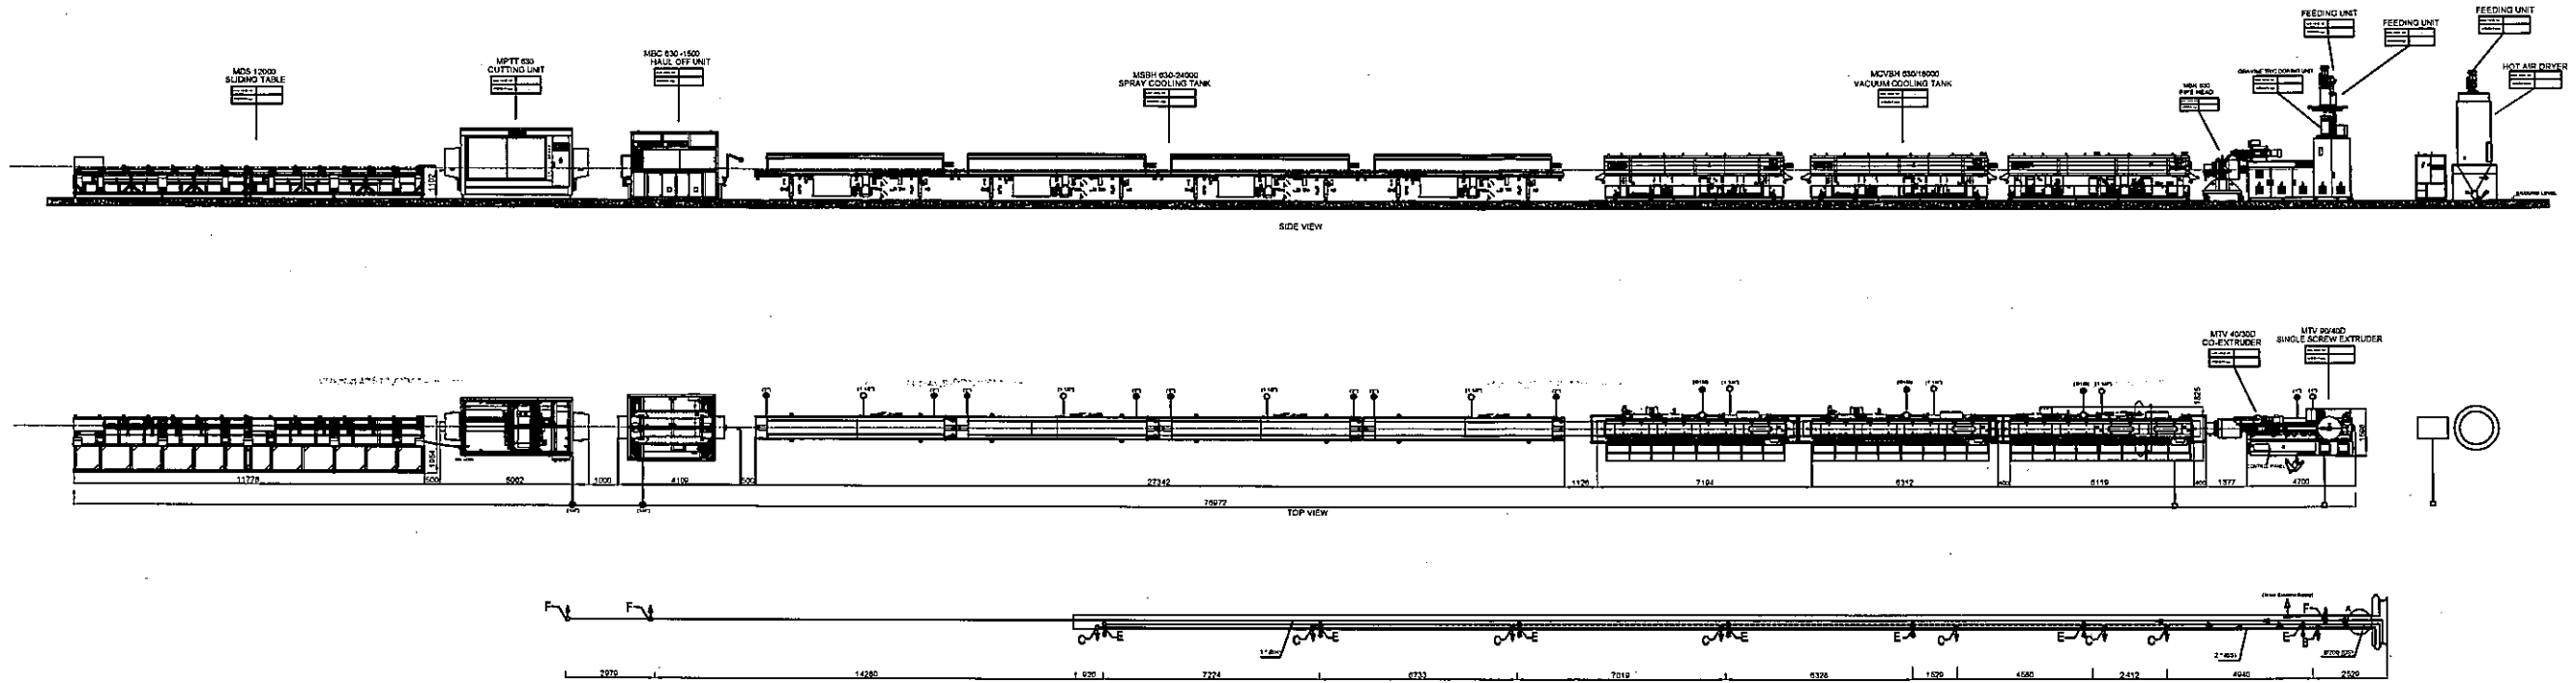

MTV 90/40D PE PIPE EXTRUSION LINE	
MTV 90/40D SINGLE SCREW EXTRUDER	500 kW
MTV 40/30D CO-EXTRUDER	20 kW
MCVBH 630/6000 VACUUM COOLING TANK	30 kW
MTVBH 630/12000 VACUUM COOLING TANK	30 kW
4x MSBH 630-6000 SPRAY COOLING TANK	4x 7,5 kW
MBC 630-1500 HAUL OFF UNIT	11 kW
MPT 630 CUTTING UNIT	8 kW
TOTAL INSTALLED POWER	599 kW
*TOTAL ELECTRIC CONSUMPTION	450 kW

\* Your total electric consumption is calculated by multiplying coefficient of 0.75. This coefficient may vary depending on operating conditions.

MTV 90/40D TECHNICAL DETAILS OF PE PIPE EXTRUSION LINE	
PRODUCTION CAPACITY	1500-1600 kg/h
WATER INLET PRESSURE	3 bar
WATER INLET TEMPERATURE (Ti)	12-15°C
WATER OUTLET TEMPERATURE (To)	Ti+5°C
TOTAL WATER CONSUMPTION	80 m³/h
AIR INLET PRESSURE	6 bar
TOTAL AIR CONSUMPTION	0,6 m³/min

LEGEND	
○	WATER INLET
●	WATER OUTLET
⊙	AIR INLET
□	ELECTRIC CONNECTION

<p><b>mikrosan</b> Makina ve Kalıp San. A.Ş.</p>	TARİH	ADI	İMZA	
	Çizim	14.04.2014	S.ARABACI	
	Kontrol	14.04.2014	A.DEMIRCI	
Onay				
PROJE ADI	RESİM NO	REV. NO	ÖLÇEK	
14 09B3 386.2 MTV 90/40D PE PIPE EXTRUSION LINE VIEWS	HYP-01	01	—	

Bu resim MİKROSAN Makina ve Kalıp Sanayi A.Ş.'nin malidir. Özgüncü şahıslara verilmez veya kopye edilme halinde kanunî talimatıdır.